



MATTPLANAR CLOTH

Gain: 1.0
 Viewing angle: 150°
 Roller height: cm. 320
 Thickness: mm. 0,90
 Approx. weight per sqm.: gr. 1050
 Fire proof certification: class 1, following
 UNI 9177

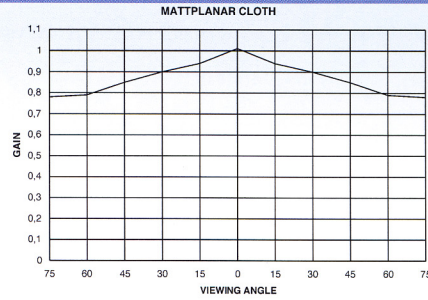


MICROHOLES CLOTH

Gain: 1.0
 Viewing angle: 150°
 Spooler height: cm. 240
 Thickness: mm. 0,31
 Approx. weight per sqm.: gr. 587
 Fire proof certification: M1

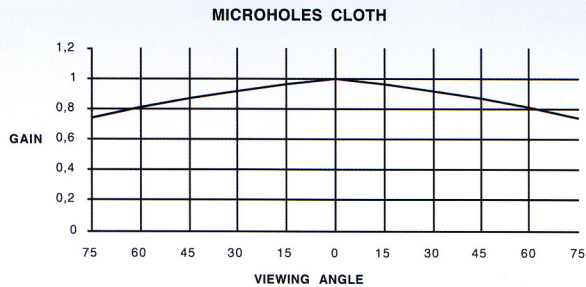


MICROPERFORATED CLOTH

Gain: 1.1
 Viewing angle: 150°
 Spooler height: cm. 240
 Thickness: mm. 0,38
 Approx. weight per sqm.: gr. 601
 Fire proof certification: M1 and M2

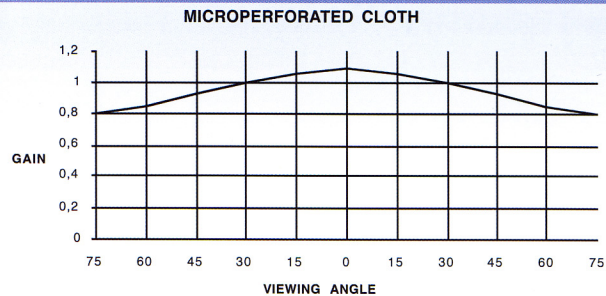

REAR PLUS CLOTH

Gain: 1.1
 Viewing angle: 120°
 Spooler height: cm. 240
 Thickness: mm. 0,30
 Approx. weight per sqm.: gr. 440
 Fire proof certification: M1 and M2

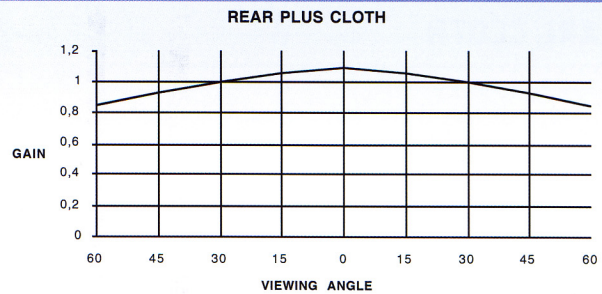

REAR LUX R114 CLOTH

Gain: 2.5
 Viewing angle: 70°
 Spooler height: cm. 300
 Thickness: mm. 0,25
 Approx. weight per sqm.: gr. 367
 Fire proof certification: NFPA 701

